



ADS2x20 MICRO 2 CHANNEL AMPLIFIER

This ADS 2x20 micro is ideally suited for installation in areas where the amplifier is not to be seen like a Bathroom, Bedroom, Kitchen, Boat etc it can be wall or ceiling mounted. Attach a docking station and using your iPod you will have all the music you require.


Features:

- . Class D high output mini stereo amplifier
- . Suited for classroom, kitchens, Bathrooms or AV applications
- . 20w per channel, or bridged 40w mono output
- . 2 mic/line switchable inputs via phoenix or dual RCA inputs
- . Left & right master volume, bass and treble controls
- . Built in limiter
- . 4 ohms per channel or bridged at 8 ohms


TECHNICAL SPECIFICATIONS

Model:	ADS2x20 Micro
DC Power:	24VDC
Frequency Response:	50Hz-18kHz (+/- 2dB)
THD at rated power:	Less Than 0.1%@1kHz (1/3 Rated power)
Mic Inputs:	5mV/600Ohm
Loudspeaker Outputs:	4-8Ohm
Signal/Noise ratio:	Better Than 85dB
Dimensions:	230 x 115 x 56
Weight:	0.9kg

Front Panel

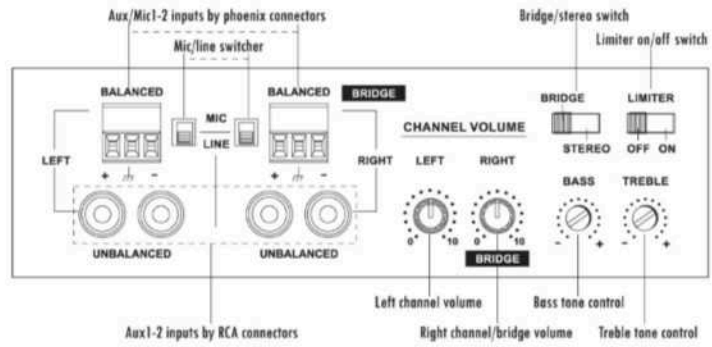

Rear Panel

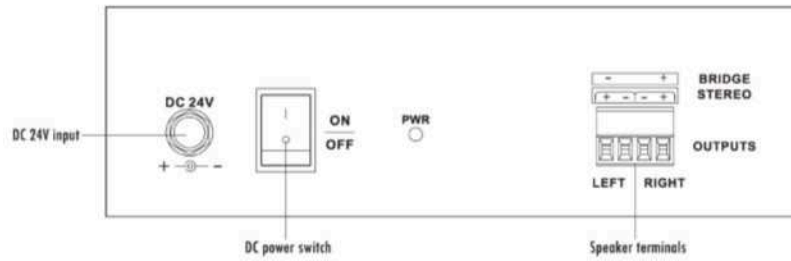

Connections

